



Technical Data

Accuracy: Refer to the list of specifications Display*: LCD Length standard: ABSOLUTE electrostatic capacitance type linear encoder Max. response speed*: Unlimited Battery*: SR44 (1 pc.), **938882** Battery life*: Approx. 3.5 years under normal use *Digital models **Analog models

Function of Digital Model

Origin-set, Zero-setting, Power On/Off, Data output, inch/mm conversion (on inch/metric models only)) Alarm: Low voltage, Counting value composition error

Optional Accessories for Digital Model

05CZA624:	SPC cable with data switch (40" / 1	m)
05CZA625:	SPC cable with data switch (80" / 2	m)

Tube Thickness Caliper

SERIES 573, 536 — ABSOLUTE Digimatic and Vernier Type

FEATURES

6

0011

0

• The main scale jaw is a round bar that facilitates measurements of tube wall thickness.

æn.

- With SPC data output. (Series 573)
- Supplied in fitted plastic case.

573-761-20 EXAMPLE 1								
536-161								
	Range	Order No.	Accuracy	Resolution	Mass(g)			
	0 - 150mm	573-661-20	±0.05mm	0.01mm	167			
Inch/Metric Digital model								
	Range	Order No.	Accuracy	Resolution	Mass(g)			
	0 - 6" / 0 - 150mm	573-761-20	±.002"	.0005" / 0.01mm	167			
	Metric							
	Range	Order No.	Accuracy	Graduation	Mass(g)			


±0.05mm

0.05mm

150

DIMENSIONS AND MASS

0 - 150mm

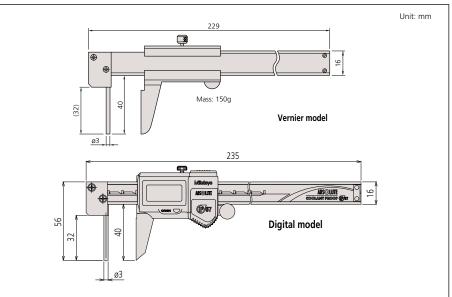

D-27

536-161





